


MF-7500 Series

High-speed, Flat-bed, Top & Bottom Coverstitch Machine

MF-7500D Series

Semi-dry-head, Flat-bed, Top & Bottom Coverstitch Machine

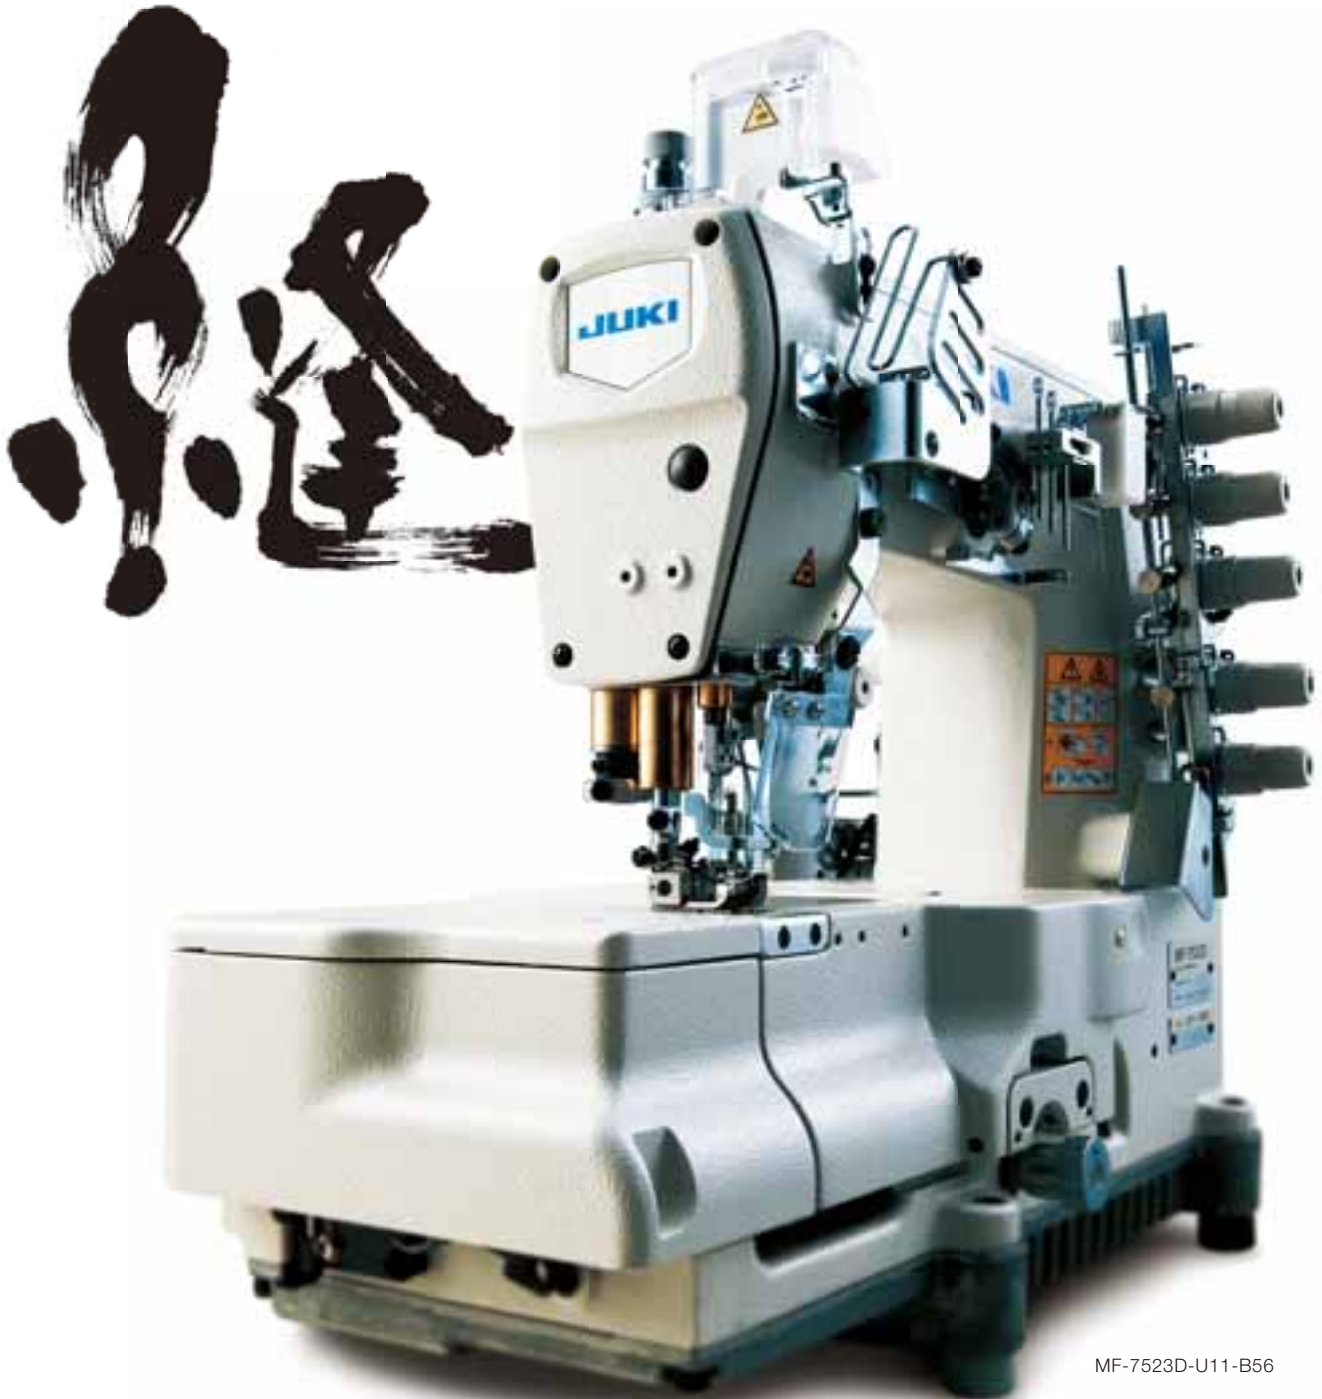

MF-7523D-U11-B56

The MF-7500 Series is a newly developed coverstitch machine provided with lots of mechanisms for improving the seam quality.

It is provided with many different sewing-related mechanisms which contribute to improved seam quality, such as the new feed mechanism, and differential-feed micro-adjustment mechanism. In addition, the machine is provided as standard with a looper thread twining prevention mechanism for improved maintenance.

MF-7500 Series
High-speed, Flat-bed,
Top & Bottom Coverstitch Machine

MF-7500/UT Series
Direct-drive, High-speed, Flat-bed,
Top & Bottom Coverstitch Machine with Needle- and Looper- Thread Trimmer


MF-7500D Series
Semi-dry-head, Flat-bed,
Top & Bottom Coverstitch Machine

MF-7500D/UT Series
Semi-dry-head, Direct-drive, Flat-bed,
Top & Bottom Coverstitch Machine with Needle- and Looper- Thread Trimmer


Seam quality is improved!!

Thanks to the new feed mechanism, many different types of sewing are achieved.

The feed locus can be adjusted externally. The feed locus is now adjustable in terms of the vertical direction and horizontal direction, thereby improving responsiveness to sewing materials.

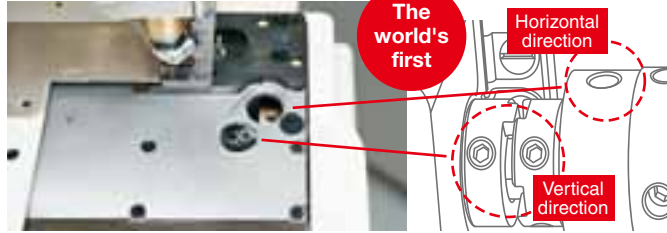


Feed longitudinal position adjustment mechanism

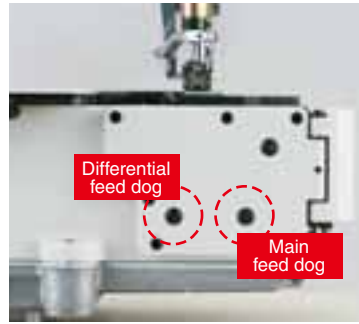


The longitudinal position of the feed is adjustable. As a result, uneven material feed and puckering that are likely to occur when sewing products made of elastic materials such as foundations are reduced. This means that the machine promises improved responsiveness to elastic materials.

Differential-feed micro-adjustment mechanism

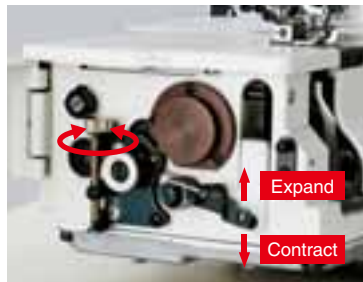

It is possible to finely adjust the differential feed amount to a best-suited value for the material to be used. The differential feed ratio is constant even if the stitch length is changed.



Micro-lifter mechanism



Elastic material or delicate material can be sewn with the presser foot kept slightly raised. This effectively helps reduce the degree of slippage, warpage and damage of the material.


All of the sewing machines with a thread trimmer are provided with a direct-drive motor.



The direct-drive motor system has been adopted by all of the sewing machines with a thread trimmer. As a result, the sewing machine starts up swiftly and promises increased stop accuracy, thereby demonstrating improved responsiveness. In addition, the machine is no longer provided with a V-belt. This means that the adoption of the direct-drive motor is also effective in the elimination of belt shavings. Power is directly transmitted from the motor to the sewing machine, thereby contributing to reduced power consumption. (This sewing machine reduces power consumption by 29% as compared with the conventional models.)

Servomotor
MF-7723/UT31/SC510

Direct-drive motor
MF-7523/UT37/SC921/CP18



JUKI ECO PRODUCTS



The MF-7523U11B56/UT37 is an eco-friendly product which complies with JUKI ECO PRODUCTS standards for protecting the environment.

- This sewing machine reduces power consumption by 29% as compared with the conventional models.
- The sewing machine complies with the "Juki Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive.

For details of JUKI ECO PRODUCTS, refer to : http://www.juki.co.jp/eco_e/index.html


*The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment. The Juki Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment.

U11

Universal type (basic type)

The machine can be used for the hemming process of the sleeves and bottoms of T-shirts and for the covering process for sportswear and knitwear.

The front cover is trimmed to allow operators to bring their hands closer near the needle entry area, thereby increasing work efficiency in the covering process, etc.

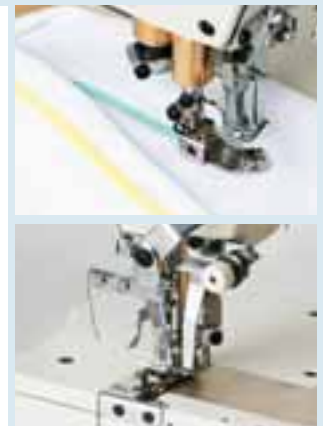

List of subclass machines

| Application | Seam | Model No. | Number of needles | Number of threads | Needle gauge (mm) | Stitch length*1 (mm) | Differential feed ratio | Presser foot lifting amount*2 (mm) | Max. sewing speed (st/min) |
|---|-----------------------|----------------------|-------------------|-------------------|-------------------|----------------------|-------------------------|------------------------------------|----------------------------|
| MF-7500-U11 Universal type (basic type) | | MF-7522-U11-B** | 2 | 4 | 3.2, 4.0 | 1.2~3.6 | 1:0.7~1:2 | 5 (8) | 6,500 |
| | | MF-7523-U11-B** | 3 | 5 | 4.8, 5.6, 6.4 | | | | 6,000 |
| | | MF-7523-U11-B**/UT35 | | | | | | | |
| MF-7523-U11-B**/UT37 | | | | | | | | | |
| MF-7500D-U11 Universal type (basic type) | | MF-7523D-U11-B** | 3 | 5 | 5.6, 6.4 | 1.2~3.6 | 1:0.7~1:2 | 5 (8) | 5,000 |
| | MF-7523D-U11-B**/UT35 | | | | | | | | |
| | MF-7523D-U11-B**/UT37 | | | | | | | | |

*1 Stitch length can be adjusted to 4.4mm at the maximum.

*2 The lift of the presser foot is 5mm for the top and bottom coverstitch machine, and 8mm for the bottom coverstitch machine

JUKI's dry-head technology protects sewing products from being stained with oil.

With the excellent functions inherited from the MF-7500 Series, the MF-7500D is provided with a dry frame mechanism to eliminate the cause of oil stains. Stain removing work or re-sewing work is substantially reduced by protecting sewing products from being stained with oil, thereby improving the quality of finished products.



The frame no longer requires oiling.

Unlike the conventional models, the oiling mechanism inside the frame has been eliminated. As a result, oil does not leak from the needle bar, presser bar or spreader shaft.



Dry-head technology has materialized a frame which does not need oiling.


The needle bar mechanism and spreader mechanism have been applied with a special surface treatment. JUKI's unique special grease is used for lubrication. Grease-filled bearings have been adopted for the crank rod. These allow the machine's frame mechanism to demonstrate outstanding durability without being oiled.



Environmental consciousness

Since oil stains on sewing products are reduced, the quantity of the use of stain remover generally used in sewing plants can be reduced.

*Dichlorofluoroethane (HCFC-141), which is generally used in oil stain cleaning fluid, is included in those chemicals which need to be reduced, as it is a substance that can harm the ozone layer.

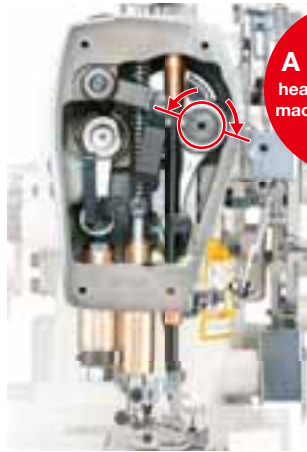

A semi-dry head type sewing machine has been added.

Needle bar stroke conversion mechanism

By changing over the needle bar stroke, penetrating force of the needle as well as thread tension to fit heavy-weight materials (fleece, blankets) can be obtained. The needle bar stroke can be changed by adjusting the eccentric pin. (Changing of parts is not required. Factory-set at the time of delivery: 31mm; for sewing heavy-weight materials: 33mm)



The semi-dry head sewing machine increases its sewing speed to 5,000 sti/min

Simplified maintenance mechanism

The looper thread twining prevention mechanism has been improved and is provided as standard for the sewing machine.

In the case of looper thread breakage, the looper thread twining prevention mechanism is activated to trim the looper thread before the thread twines on the looper thread cam. In this way, the looper thread twining prevention mechanism prevents the looper thread from twining on the looper thread cam. In addition, the looper thread cam, which has been incorporated in the sewing machine, has been changed so that it is mounted outside of the sewing machine. The externally-mounted looper thread cam promises improved maintainability.



The world's first

Commercially-available gauge components are applicable with no additional work.

As a result of the commonality of components, commercially-available components (presser foot, throat plate and needle clamp) are now applicable and easily obtainable.

C11

For collarette attaching

This model is best suited for attaching collarettes on underwear, briefs and knitwear. Ease of use is further improved by using the electromagnetic type tape cutter (TC16).




List of subclass machines

| Application | Seam | Model No. | Number of needles | Number of threads | Needle gauge (mm) | Stitch length*1 (mm) | Differential feed ratio | Presser foot lifting amount*2 (mm) | Max. sewing speed (sti/min) |
|--|------|-----------------------|-------------------|-------------------|-------------------|----------------------|-------------------------|------------------------------------|-----------------------------|
| MF-7500-C11 For collarette attaching | | MF-7522-C11-B** | 2 | 4 | 3.2,4.0 | 1.2~3.6 | 1:0.6~1:1 | 5 (8) | 6,500 |
| | | MF-7522-C11-B40/TC16 | | | 4.0 | | | | |
| | | MF-7523-C11-B** | 3 | 5 | 4.8,5.6,6.4 | | | | |
| MF-7523-C11-B56/TC16 | 5.6 | | | | | | | | |
| MF-7500D-C11 For collarette attaching | | MF-7522D-C11-B40 | 2 | 4 | 4.0 | 1.2~3.6 | 1:0.7~1:1.1 | 5 (8) | 5,000 |
| | | MF-7522D-C11-B40/TC16 | | | | | | | |
| | | MF-7523D-C11-B** | 3 | 5 | 5.6,6.4 | | | | |
| MF-7523D-C11-B56/TC16 | 5.6 | | | | | | | | |

Replacement parts for basic type

A front bracket is supplied with the sewing machine as an accessory.



*1 Stitch length can be adjusted to 4.4mm at the maximum.

*2 The numeric value indicates the lifting amount of the presser foot for top and bottom coverstitch. The numeric value given in parentheses indicates the lifting amount of the presser foot for bottom coverstitch.

DEVICE

UT35

Electromagnetic needle thread / looper thread trimming device / Auto-lifter

It is an electromagnetic needle thread / looper thread trimming device / Auto-lifter.

The machine does not need an air compressor to achieve easy layout changing.



Electromagnetic needle thread / looper thread trimming device

UT37

Pneumatic type needle thread / looper thread trimming device / Auto-lifter

It is a pneumatic type needle thread / looper thread trimming device / Auto-lifter. Since the automatic lift of the presser foot and automatic thread trimming can be activated by lightly depressing the pedal, work efficiency is dramatically increased.

The air blow type wiper is supplied with the sewing machine as an accessory.



Pneumatic type needle thread / looper thread trimming device

TC16

Electromagnetic type tape cutter

It is a device for cutting the tape or lace at the beginning or end of sewing. It is easily actuated to cut tape with the knee switch.

(The TC16 can be retrofitted to the machine.)



TC16

- The knife is able to cut lace and tape up to 40mm wide.
- The sharpness of the knife can be easily adjusted. In addition, replacement of the moving knife and counter knife, as well as the adjustment of their mesh, can be carried out with ease.

WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:

MF-7500

● Without automatic thread trimmer

| Stitch type | Code | Tongue shape of throat plate | Code |
|--------------------------------------|------|------------------------------|------|
| 2-needle, top and bottom coverstitch | 22 | B type (Standard) | B |
| 3-needle, top and bottom coverstitch | 23 | | |

MF75□□□□□B□□/□□□□□□

| Application | Code | Needle gauge | Code | Device and attachment | Code |
|---------------------|------|--------------|------|--|-------|
| Universal type | U11 | 3.2mm | 32 | Not provided | |
| Collarete attaching | C11 | 4.0mm | 40 | Electromagnetic type tape cutter (3-phase 200-440V) | TC16A |
| | | 4.8mm | 48 | Electromagnetic type tape cutter (Single-phase 100-240V) | TC16B |
| | | 5.6mm | 56 | Electromagnetic type tape cutter (SC-921) | TC16C |
| | | 6.4mm | 64 | | |

*Refer to the subclass models list for the needle gauge of the respective models.

● With automatic thread trimmer

| Stitch type | Code | Application | Code | Tongue shape of throat plate | Code |
|--------------------------------------|------|----------------|------|------------------------------|------|
| 3-needle, top and bottom coverstitch | 23 | Universal type | U11 | B type (Standard) | B |

MF7523U11B□□UT□□

| Needle gauge | Code | Thread trimming device | Code |
|--------------|------|--|------|
| 4.8mm | 48 | Electromagnetic type top and bottom thread trimming device | UT35 |
| 5.6mm | 56 | Pneumatic type top and bottom thread trimming device | UT37 |
| 6.4mm | 64 | | |

MF-7500D (Semi-dry-head)

● Without automatic thread trimmer

| Stitch type | Code | Tongue shape of throat plate | Code |
|--------------------------------------|------|------------------------------|------|
| 2-needle, top and bottom coverstitch | 22 | B type (Standard) | B |
| 3-needle, top and bottom coverstitch | 23 | | |

MF75□□□□□D□□□□B□□/□□□□□□

| Application | Code | Needle gauge | Code | Device and attachment | Code |
|---------------------|------|--------------|------|--|-------|
| Universal type | U11 | 4.0mm | 40 | Not provided | |
| Collarete attaching | C11 | 5.6mm | 56 | Electromagnetic type tape cutter (3-phase 200-440V) | TC16A |
| | | 6.4mm | 64 | Electromagnetic type tape cutter (Single-phase 100-240V) | TC16B |

*Refer to the subclass models list for the needle gauge of the respective models.

● With automatic thread trimmer

| Stitch type | Code | Application | Code | Tongue shape of throat plate | Code |
|--------------------------------------|------|----------------|------|------------------------------|------|
| 3-needle, top and bottom coverstitch | 23 | Universal type | U11 | B type (Standard) | B |

MF7523DU11B□□UT□□

| Needle gauge | Code | Thread trimming device | Code |
|--------------|------|--|------|
| 5.6mm | 56 | Electromagnetic type top and bottom thread trimming device | UT35 |
| 6.4mm | 64 | Pneumatic type top and bottom thread trimming device | UT37 |

SPECIFICATIONS (U11, C11)

| Model name | MF-7500 series | MF-7500D series |
|---|---|---|
| Stitch type | 2-needle/3-needle top and bottom covering stitch | 2-needle/3-needle top and bottom covering stitch |
| Needle | UY128GAS (#10S) #9~#14S | |
| Lift of the presser foot | 5mm (with top and bottom covering stitch), 8mm (with bottom covering stitch) | |
| Stitch pitch adjustment | By dial | |
| Differential feed adjustment | By micro-adjustment mechanism | |
| Lubrication | Automatic | Automatic (frame: no lubrication) |
| Lubricating oil | JUKI Machine Oil 18 (equivalent to ISO VG18) | |
| Feed dog inclination adjustment | Provided as standard | |
| Micro-lifter | Provided as standard | |
| Needle gauge (mm) | 3.2, 4.0, 4.8, 5.6, 6.4 | |
| Needle bar stroke converting function | Provided as standard: 31mm: at the time of delivery / When sewing a heavy-weight material: 33mm | |
| Silicon oil tank for needle tip and needle thread | Provided as standard | |
| Cartridge oil filter | Provided as standard | |
| Power requirement | Single-phase 100~120V / 200~240V, 3-phase 200~240V (with automatic thread trimmer) | |
| Power consumption | 500VA (with automatic thread trimmer) | |
| Weight of the machine head | U11 | 45kg (without device), 53kg (with UT35), 58kg (with UT37) |
| | C11 | 45kg (without device) |

**sti/min* stands for *Stitches per Minute.*

Compressedair / Air consumption (with automatic thread trimmer)

| UT37 | | Air consumption dm ³ /min (ANR) | Compressed air MPa |
|---|---------------------|--|--------------------|
| Top and bottom thread trimmer Auto-lifter | Air blow type wiper | | |
| ● | — | 0.7 | 0.5 |
| ● | ● | 182 | |



JUKI CORPORATION HEAD OFFICE

Juki Corporation operates an environmental management system to promote and conduct the following as the company engages in the research, development, design, sales, distribution, and maintenance of industrial sewing machines, household sewing machines, industrial robots, etc., and in the provision of sales and maintenance services for data entry systems:

- (1) The development of products and engineering processes that are safe to the environment
- (2) Green procurement and green purchasing
- (3) Energy conservation (reduction in carbon-dioxide emissions)
- (4) Resource saving (reduction of papers purchased, etc.)
- (5) Reduction and recycling of waste
- (6) Improvement of logistics efficiency (modal shift and improvement of packaging, packing, etc.)

JUKI® 2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN
 PHONE : (81) 42-357-2254
 FAX : (81) 42-357-2274
 http://www.juki.com

- * Specifications and appearance are subject to change without prior notice for improvement.
- * Read the instruction manual before putting the machine into service to ensure safety.
- * This catalogue prints with environment-friendly soyink on recycle paper.